
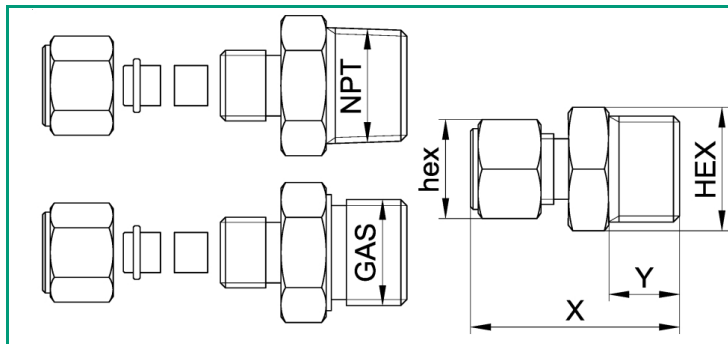


**CFP60**

Rev. 0 - 24/05/2021

**COMPRESSION SLIDE FITTINGS IN PTFE SEALANT GLAND + STAINLESS STEEL PRESSING BUSH FOR Ø 6 mm**

Specially designed to allow the direct immersion of the entire range of thermoelements with mineral insulation

		Y mm	X mm	HEX mm	hex mm
1/4	NPT	15	~45	17	17
	GAS	10	~40	17	
3/8	NPT	15	~45	17	
	GAS	15	~45	22	
1/2	NPT	20	~50	22	
	GAS	15	~45	24	
3/4	NPT	20	~50	27	
	GAS	20	~50	32	

**TECHNICAL SPECIFICATION**

<b>Ferrule</b>	PTFE ring + stainless steel packing
<b>Sheath diameter d=</b>	Ø 6 mm
<b>For probe</b>	Ø 6 mm
<b>Fixing system</b>	threaded connection

## TECHNICAL SPECIFICATION

<b>Process Connection</b>	threaded 1/4" CYL. GAS acc. UNI-ISO 228 threaded 1/4" NPT acc. ANSI B 1.20.1 threaded 3/8" CYL. GAS acc. UNI-ISO 228 threaded 3/8" NPT acc. ANSI B 1.20.1 threaded 1/2" CYL. GAS acc. UNI-ISO 228 threaded 1/2" NPT acc. ANSI B 1.20.1
<b>Sheet material</b>	AISI 316
<b>Type of tightness</b>	ring PTFE PN MAX 20 BAR (T MAX 100 °C)