


TUBE RTD WITH 3-WIRE SILICONE RUBBER CABLE

RTD in tube with 3-wire silicone rubber conventional insulated cable

- price-efficient implementation
- range of use $-50 \div 180^{\circ}\text{C}$

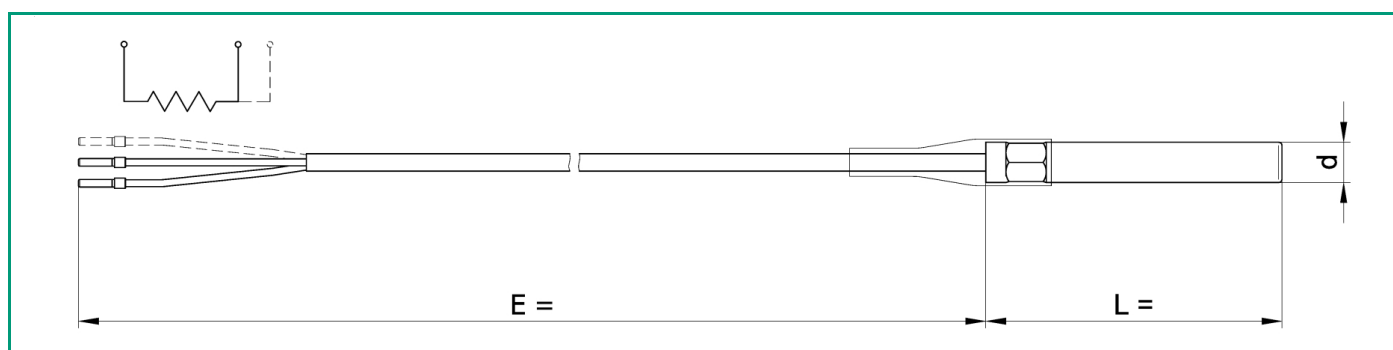

TECHNICAL SPECIFICATION

Sensing element	Pt100 Ω @ 0°C Pt1000 Ω @ 0°C
Sensing Element configuration	single 3-wire
Accuracy class in accordance to IEC751 (*) (*) Pt 100 cl.A only available with 3 or 4 wires, cl.AA 4 wires only; Pt 1000 cl. A available with 2 wires only for cable lengths below 1 m, for longer cables only available with 3 or 4 wires, cl. AA 3 wires for cable lengths below 1 m, for longer cables only 4 wires.	cl. A cl. B
Sensing element operating temperature range	$-50 \div 180^{\circ}\text{C}$
Insulation resistance	100 M Ω @ 100 Vdc.
Sheath outside diameter d	\varnothing 6 mm
Sheath length L	50 mm 100 mm
Sheet material	INOX
TC/RTD cable to wire	insulated in silicone rubber
Cable conductors	copper tinned

TECHNICAL SPECIFICATION

Number of cable conductors	3
Conductor dimension	AWG 22
Conductor feature	strand (11 wire)
Primary insulation	GS (silicone rubber)
Primary insulation colour	1 white, 2 red
Secondary insulation	GS (silicone rubber)
Secondary insulation colour	black
Cable size or external shape	about Ø 4,5 mm
Cable working temperature	-40 ÷ 180°C
Cable extension E	500 mm 1 m 2 m 3 m 4 m 5 m 8 m 10 m
Dimensional notes	Lengths other than those listed can be produced for minimum quantities to be agreed (after our feasibility study) Extensions other than those listed can be produced for minimum quantities to be agreed (after our feasibility study)
Fixing system	bare stem
Variant (TRE-TCE)	null and anti-bending spring