

L033026C

Rev. 1 - 08/12/2022

HOT WATER DISPENSER WITH STAINLESS STEEL AERATOR


-ball joint $\varnothing$ 14,3 mm in CW510L BRASS (T.E.A. treatment)

-G 3/8 cap in CW510L BRASS (T.E.A. treatment)

-stainless steel water separator

supplied components: spring, spring guide and O-ring seal.

Materials used in compliance with the application and reference standards for contact with foodstuffs.

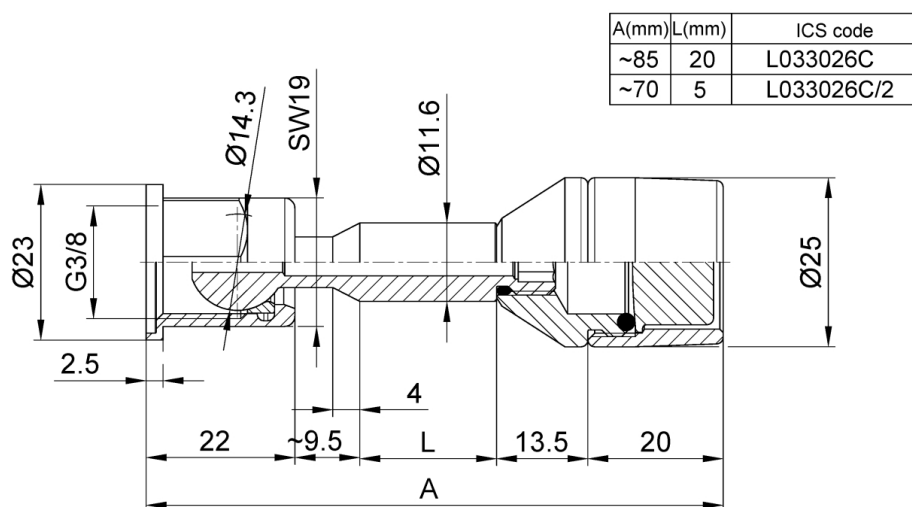

TECHNICAL SPECIFICATION

Sheath length L	5 mm 20 mm
Sheet material	OTTONE CW510L rivestito T.E.A.
Sheath diameter d	Ø 11.6 mm
Threaded process connection (*) (*) Thread STANDARDS (CYL. GAS in accordance with UNI-ISO 228) (CON. GAS in accordance with UNI-ISO 7-1) (NPT in accordance with ANSI B 1.20.1)	3/8" GAS CIL.
FCM Prescriptions	Before the use is required to wash the food contact areas
Contact food type	ACQUA
Type of contact	short and frequently
Contact food temperature range	0 ÷ 100°C
Notes for FCM	la LANCIA ACQUA è idonea al contatto con ACQUA fino a 100°C (se presente aeratore plastico sino a 70°C)