


PCVJM12GS

Rev. 0 - 26/09/2026

EXTENSION CABLES M12x1 WITH COMPENSATED CABLE TYPE J WITH SILICONE RUBBER INSULATION

Extension cables with compensated connector suitable for probes type J our model TCSV12

- OVERMOULDED connection
- compensated cable type J with SILICONE RUBBER insulation
- IP67 protection degree

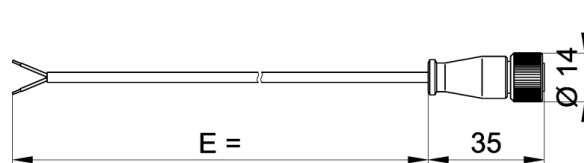

TECHNICAL SPECIFICATION

Type of connector	Female connector with contacts with M12x1 metal screw lock (in accordance with IEC 61076-2-101 STANDARDS)
Connection body material	POLYAMIDE (MOULDED)
Maximum connector temperature	90°C
International protection marking (*) (*) According to IEC 60529	IP67
Female connector	Overmoulded straight M12 female connector
Male connector	Contatti aggraffati con portacontatti
Compensated cable	Silicone; type J IEC
Cable conductors	Tipo J
Norm of reference	IEC 584
Number of cable conductors	2
Conductor dimension	AWG 24
Conductor feature	Strand (7 wire)
Primary insulation	GS (silicone rubber)
Secondary insulation	GS (silicone rubber)
Cable size or external shape	About Ø 4,2 mm
Cable working temperature	-40 ÷ 180°C
Cable extension E	1500 mm 3 m 5 m