


**TWCF30**

Rev. 0 - 24/05/2021

# TUBE THERMOWELL IN AISI 316 FOR PROBE Ø 3 mm

It allows rapid replacement of the thermoelement without emptying the process

- Suitable for inserting probes Ø 3 mm
- wide range of threaded connections
- Sealing system with special spinner (carved) that allows repeated tightening without damaging the probe

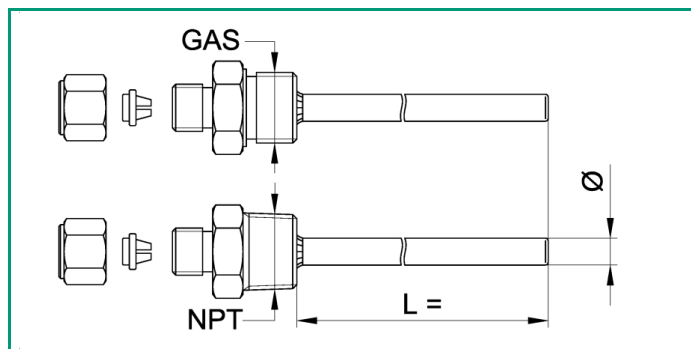

## TECHNICAL SPECIFICATION

<b>Thermowell pipe</b>	Ø5x3.5 AISI316L,
<b>Sensor fixing mechanism</b>	by means of reversible (cut) metal ferrule
<b>For probe</b>	Ø 3 mm
<b>Fixing system</b>	threaded connection
<b>Process Connection</b>	threaded 1/8" GAS CIL. acc. UNI-ISO 228 threaded 1/8" NPT acc. ANSI B 1.20.1 threaded 1/4" CYL. GAS acc. UNI-ISO 228 threaded 1/4" NPT acc. ANSI B 1.20.1 threaded 3/8" CYL. GAS acc. UNI-ISO 228 threaded 3/8" NPT acc. ANSI B 1.20.1 threaded 1/2" CYL. GAS acc. UNI-ISO 228 threaded 1/2" NPT acc. ANSI B 1.20.1
<b>Sheet material</b>	AISI 316
<b>Stem length L</b>	50 mm 100 mm 150 mm 200 mm 300 mm 400 mm

## TECHNICAL SPECIFICATION

**Dimensional notes**

Lengths other than those listed can be produced for minimum quantities to be agreed (after our feasibility study)

**Maximum working pressure**

PN 100 BAR (350°C)

**ITALCOPPIE SENSORI srl**

Via A. Tonani, 10 - Fraz. S. Giacomo al Campo  
26030 Malagnino (CR) - Italy

[www.italcoppie.it](http://www.italcoppie.it)

WE SENSE  **TEMPERATURE**