


# TUBE THERMOWELLS IN AISI 316 FOR PROBE Ø 8 mm

Allow rapid replacement of the thermoelement without emptying the process

- Suitable for inserting probes Ø 8 mm
- wide range of threaded connections
- Sealing system with special spinner (carved) that allows repeated tightening without damaging the probe

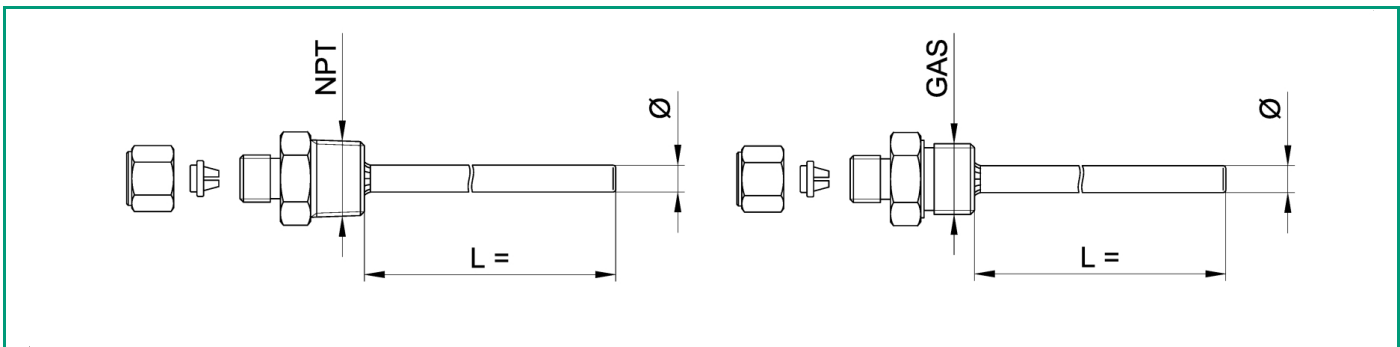

## TECHNICAL SPECIFICATION

<b>Thermowell pipe</b>	Ø12 x 9 mm AISI316L
<b>Sensor fixing mechanism</b>	by means of reversible (cut) metal ferrule
<b>For probe</b>	Ø 8 mm
<b>Fixing system</b>	threaded connection
<b>Process Connection</b>	threaded 1/2" CYL. GAS acc. UNI-ISO 228 threaded 1/2" NPT acc. ANSI B 1.20.1 threaded 3/4" NPT acc. ANSI B 1.20.1
<b>Sheet material</b>	AISI 316
<b>Realizable sheat lengths L= (subject to feasibility check)</b>	50 mm ÷1000 mm
<b>Maximum working pressure</b>	PN 100 BAR (350°C)